

ATENA 980 | Exposed Door Closer



ATENA[®]
THE PRIDE OF EVERY DOOR

www.atenaclosers.com

ATENA INTERNATIONAL

26 Sin Ming Lane, Midview City, #02-112/113, Singapore 573971
Tel: +65 6842 4349 Fax: +65 6842 7578
Email: enquiry@atenaclosers.com



ATENA[®]
THE PRIDE OF EVERY DOOR


ATENA 980 | Exposed Door Closer




Specifications & Features

Closing Force - Spring Strength (EN)		Fixed Size from 2 to 4		
Application:		Non Handed		
Standard Installation Door Width		850mm to 1100mm		
Maximum Door Weight		80kg		
Arm Type - Standard		Snap On		
Closing Speed Angle		15° - 180° degrees. Adjustable by valve		
Latching Speed Angle		0° - 15° degrees. Adjustable by valve		
Door Opening Angle		180° degree		
Back Check		Optional / Adjustable		
Slide Arm Option		Optional		
Hold Open by Project Arm		Optional		
Hold Open by Slide Arm		Optional		
Finish:		Standard Silver (Oven Process) Optional: White, Dark Brown and Gold		
Dimension in mm	Length	207mm		
	Height	55mm		
	Projection	40mm		
Technical Data		EN2	EN3	EN4
Maximum Door Width		850	950	1100
Maximum Door Weight		35	60	80


Dimension Layout

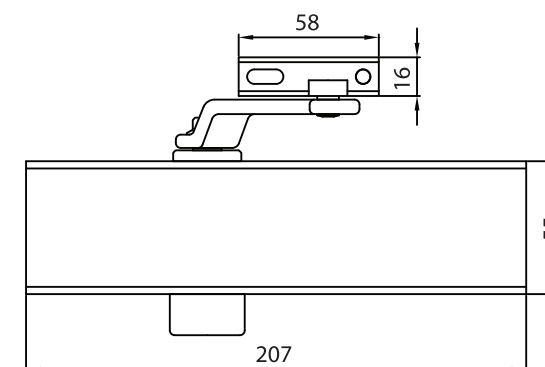


Standard Mount
(Pull Side)

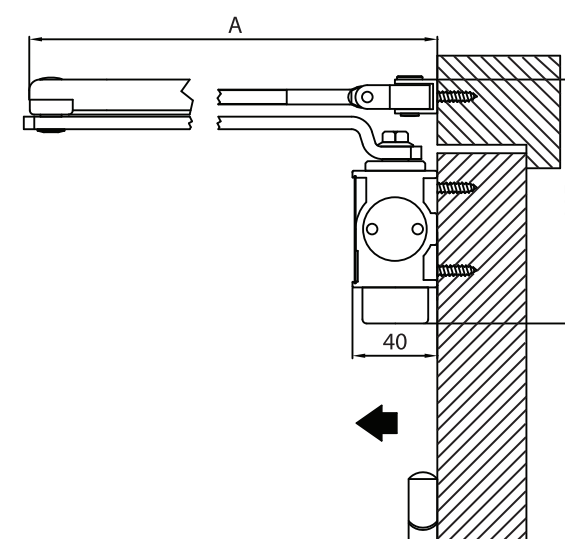

Top Jamb
(Push Side)

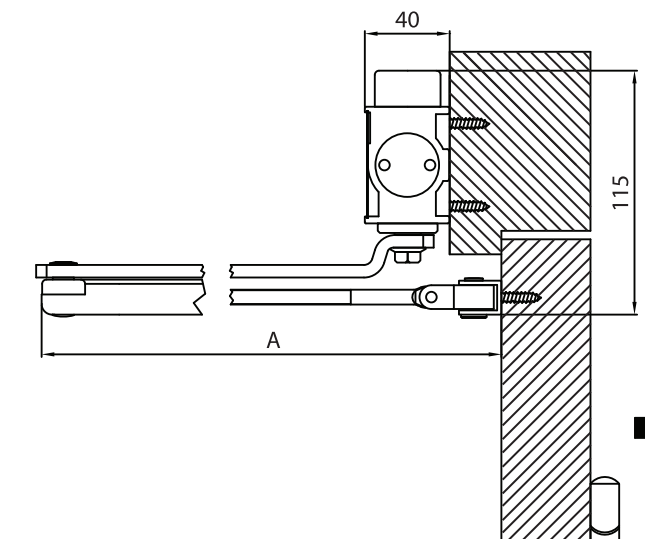


Adjustable Closing and Latching Speed

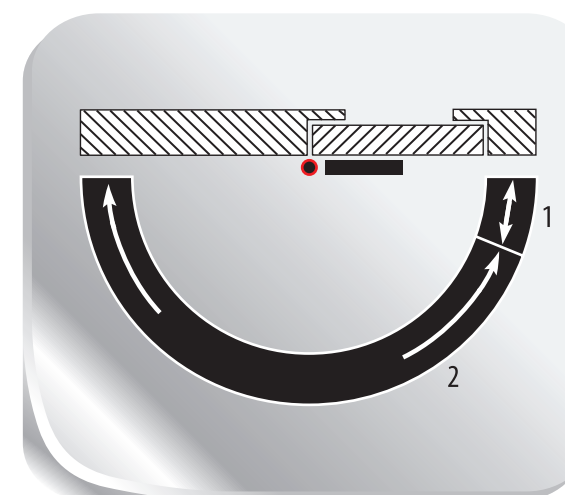

- 1. 0° to 15° Latching Speed
- 2. 15° to 180° Closing Speed

Hold-Open (Optional)

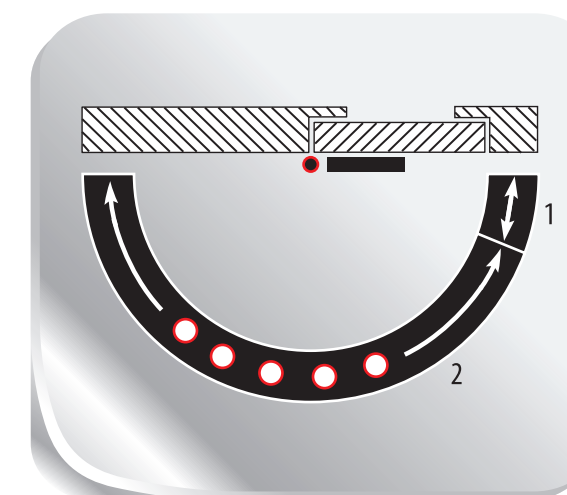

- 1. 0° to 15° latching speed
- 2. Optional hold open arm
Hold open range up to 150°